

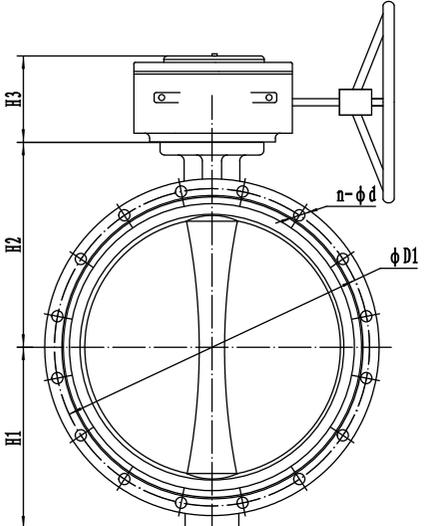


MATERIAL TABLE


BODY	DISC	SEAT	STEM	END COVER
DUCTILE CAST IRON	304SS, 316SS, 316L	EPDM	416SS	DUCTILE CAST IRON
GRAY CAST IRON	1.4469, 1.4529	NBR	45#	GRAY CAST IRON
	Ductile iron			
	C95400			

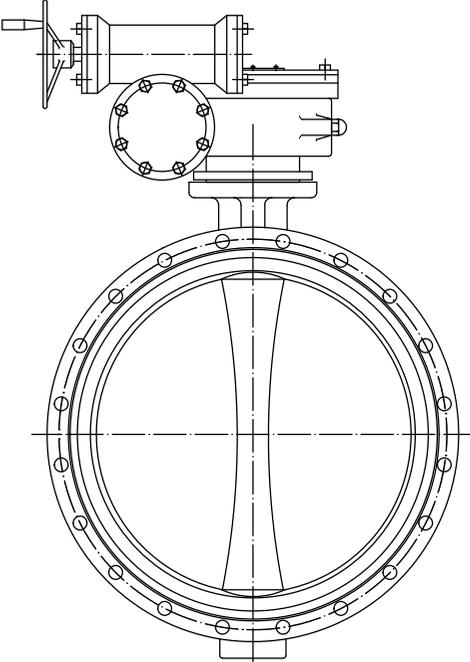

Ø400-450mm

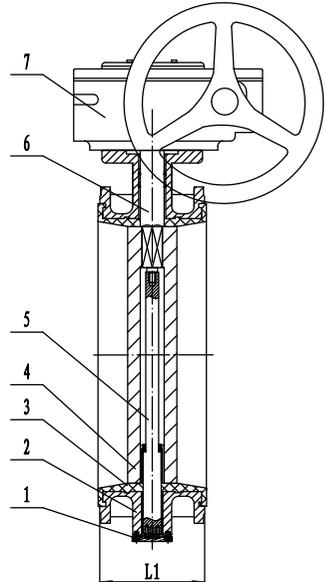

Ø500-600mm

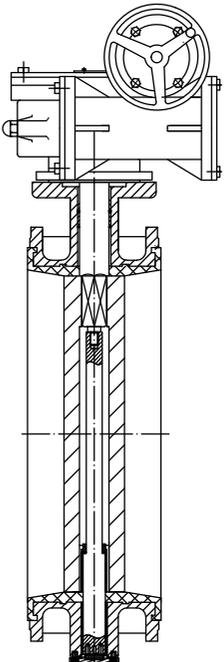

Size	L1	φD1	n-φd	H1	H2	H3
400mm	216	515/525	16-26/30	283	377	125
450mm	222	565/585	20-26/30	317	375	125
500mm	229	620/650	20-26/33	355	430	110
600mm	267	725/770	20-30/36	410	500	128

Remark: Working pressure PN10/16, Flange standard according to GB/T 9113.1-2000.

MAX WORKING PRESS	10 / 16 bar
SHELL TEST	15 / 24 bar
SEAT TEST	11 / 17.6 bar
TEST FLUID	Water


7	WORM GEAR	1	HT200
6	UPPER STEM	1	SEE MATERIAL TABLE
5	LOWER STEM	1	
4	DISC	1	
3	SEAT	1	SEE MATERIAL TABLE
2	BODY	1	
1	END COVER	1	
ITEM NO.	PART NAME	Q'TY	MATERIAL



北京好利阀业集团有限公司
Beijing HAOLIFA valve group manufacturing CO., LTD.

DESN BY CHK BY AUTH BY ISSUE DATE

MATERIAL



SCALE

UNIT mm

370D-PN10/16 BUTTERFLY VALVE

Ø400mm ~ 600mm WORM GEAR OPERATED

SIZE A4

DRAWING NO.

REV